

AD-A238 064



DTIC

ELECTE

JUL 11 1991

J C D

AD

AD-E402 222

Technical Report ARFSD-TR-90028

## BASIC SIMPLE MODELING OF IN-BORE MOTION OF RAILGUN PROJECTILES

Szu Hsiung Chu

July 1991



US ARMY  
ARMAMENT MUNITIONS  
& CHEMICAL COMMAND  
ARMAMENT RDE CENTER

**U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND  
ENGINEERING CENTER**

**Fire Support Armaments Center**

**Picatinny Arsenal, New Jersey**

Approved for public release; distribution unlimited.

91-04509



91 7 09 083

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.

The citation in this report of the names of commercial firms of commercially available products or systems does not constitute official endorsement by or approval of the U.S. Government.

Destroy this report when no longer needed by any method that will prevent disclosure of contents or reconstruction of the document. Do not return to the originator.

REPORT DOCUMENTATION PAGE			Form Approved OMB NO. 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302 and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.</small>				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE July 1991	3. REPORT TYPE AND DATES COVERED		
4. TITLE AND SUBTITLE  BASIC SIMPLE MODELING OF IN-BORE MOTION OF RAILGUN PROJECTILES		5. FUNDING NUMBERS		
6. AUTHOR(S)  Szu Hsiung Chu				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  ARDEC, FSAC Electric Armaments Division (SMCAR-FSE) Picatinny Arsenal, NJ 07806-5000		8. PERFORMING ORGANIZATION REPORT NUMBER  Technical Report ARFSD-TR-90028		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)  ARDEC, IMD STINFO Br ATTN: SMCAR-IMI-I Picatinny Arsenal, NJ 07806-5000		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES  This is the first of three basic reports on in-bore balloting motion of a projectile launched in an electromagnetic railgun.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Approved for public release; distribution unlimited.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) <p>In an electromagnetic (EM) railgun a projectile encounters a complex force environment during launch. A thorough understanding of these forces is critical to projectile and gun tube design. There are many parameters involved and interacting relationships which must be determined. To better understand and establish the in-bore force models, we begin with a basic simple model which computes only the axial motion. More complicated models will be introduced in subsequent reports which will include lateral forces and gun tube vibration effects.</p> <p>This report deals with a very simple axial motion model. Only the effects of the propulsion force, projectile package mass, air resistance, and the friction forces are presented. Equations of motion are derived and solved. A sample computation with available data is performed and curves plotted to give clearer understanding of the results.</p>				
14. SUBJECT TERMS  In-bore motion      Balloting      Gun dynamics      Projectile      Railgun			15. NUMBER OF PAGES 15	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT  SAR	

## CONTENTS

	Page
Introduction	1
Discussion	2
Assumptions	2
Governing Equations	2
Solution of Governing Equations	5
Sample of Computation	6
Conclusions	10
References	11
Distribution List	13

## FIGURES

1	Barrel and projectile package, configuration and axial forces	2
2	Rail current versus time	6
3	Acceleration versus time	7
4	Acceleration versus displacement	7
5	Velocity versus time	8
6	Velocity versus displacement	8
7	Displacement versus time	9

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



## INTRODUCTION

A previous study of projectile in-bore motion in electromagnetic railguns (ref) concluded that in-bore motion affects the lateral impact of the projectile on the barrel, muzzle jump, intermediate and terminal ballistics, and consequently the accuracy of hitting the target. Lateral forces also affect the contents of the projectile such as its electronic package. The force structure and in-bore projectile dynamics are an important concern in the development of an armament system for an electromagnetic launcher. In addition, unlike for a conventional gun, the circumferential construction of the barrel is not uniform, complicating the analytic work.

To make the problem easier to understand, it was decided to analyze the problem on several levels. Beginning from the basic simple model which computes only the axial motion, more complicated models will be introduced to include as many lateral forces and gun tube vibration effects as possible. This is the first of three basic reports documenting the in-bore forces acting on the electromagnetic railgun projectile.

Only the axial motion of the projectile package inside the barrel is considered in this report. The analysis is simplified by ignoring many complicated effects, such as the compression effect of the projectile, barrel expansion, gun vibration, thermal effect, and the rotational motion and related effects. The propulsion force is assumed to be a known quantity. The friction force between the projectile package and the barrel is included. The effect of armature and projectile weights and the drag force of air resistance are considered. Consequently, the equations of motion are formulated by considering the projectile in a linear dynamic equilibrium under the action of the above-mentioned forces.

The solutions to the derived equations are obtained by either closed form or numerical methods. The first step is to compute the acceleration versus time profile. After this, velocity and travel down the rails are obtained by the integration technique. This gives a basic knowledge of the in-bore motion.

Sample calculations are given with the available data. Figures are included to show projectile displacement, velocity and acceleration as a function of time.

## DISCUSSION

### Assumptions

The projectile and the armature are assumed to be integrated into one projectile package. The propulsion force is applied uniformly to the rear face of the armature, so that its resultant is acting at the armature base center. It is coinciding and directed along the barrel centerline as is the mass center of the projectile package. All components such as the barrel, projectile and armature are considered rigid bodies.

The axial components of the resultant forces of friction, projectile package weight, propulsion force and air resistance are considered to act along the barrel centerline, since only the axial linear motion is analyzed. The resultants of the forces normal to the barrel centerline and their moments are ignored. The normal motion and rotation are, therefore, not considered in this simple basic model.

### Governing Equations

From the above-mentioned conditions equations of equilibrium are derived from forces along the x-axis which is also the centerline of the barrel. The projectile package, the rails and the resultant acting forces are shown in figure 1. The x-axis or the barrel may have an inclination angle,  $\alpha$ , with respect to the horizon.

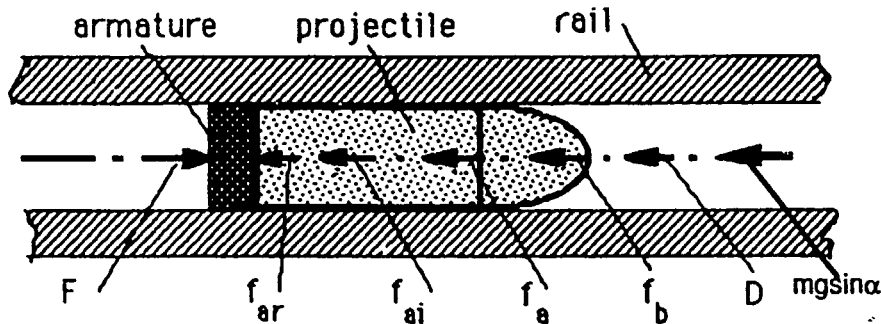


Figure 1. Barrel and projectile package configuration and axial forces

The governing equation is formulated from Newton's second law of motion as follows

$$ma = F - f_{ar} - f_{ai} - f_a - f_b - D - mgsin\alpha \quad (1)$$

where

- $m$  = mass of projectile package or sum of masses of armature and projectile
- $a$  = axial or x-direction acceleration of projectile package
- $F$  = total propulsion or Lorentz force
- $f_{ar}$  = resultant friction force between armature and rail due to uniform circumferential compression
- $f_{ai}$  = resultant friction force between armature and insulator due to uniform circumferential compression
- $f_a$  = friction force between armature and rail due to projectile package weight
- $f_b$  = friction force between bourrelet and rail due to projectile package weight
- $D$  = drag force of air resistance
- $g$  = gravitational constant = 9.81 m/sec/sec
- $\alpha$  = inclination of x-axis or barrel with respect to the horizon (angle of elevation)

Friction forces ( $f_{ar}$ ,  $f_{ai}$ ,  $f_a$  and  $f_b$ ) will be determined from the friction coefficients and the design or actual contact pressure at the armature-rail, armature-insulation, bourrelet-rail and bourrelet-insulation interfaces. They are difficult to determine and some simplified approximations from experiments are recommended. The friction equations are derived from geometrical conditions, force reactions, and the friction law as follows:

$$f_{ar} = 2\mu_{ar} R b p_r \beta \quad (2a)$$

$$f_{ai} = 2\mu_{ai} R b p_i (\pi - \beta) \quad (2b)$$

$$f_a = \mu_{ar} \frac{h}{l + h} m g \cos \alpha \quad (2c)$$

$$f_b = \mu_b \frac{l}{l + h} m g \cos \alpha \quad (2d)$$

where

- $\mu_{ar}$  = friction coefficient of armature on rail
- $\mu_{ai}$  = friction coefficient of armature on insulation
- $\mu_b$  = friction coefficient of bourrelet on rail
- $b$  = width of armature circumferential contact
- $p_r$  = contact pressure between armature and rail
- $p_i$  = contact pressure between armature and insulation

- R = radius of barrel bore
- $\beta$  = angle subtended by rail with respect to barrel center
- $\pi$  = 3.141593
- $l$  = distance between center of gravity and base of armature
- h = distance between bourrelet and center of gravity

However, these frictions may be ignored if the coefficients of frictions are low, which are the usual cases.

The drag force of air resistance, D, may be computed from the aerodynamic drag equation

$$D = .5\rho AC_D v^2 \quad (3)$$

where

- $\rho$  = air density
- A = bore cross-sectional area  
=  $\pi R^2$
- $C_D$  = drag coefficient
- v = axial velocity of projectile

The Lorentz force, F, may be computed from a special formula using rail current and inductance values

$$F = .5L' I^2 \quad (4)$$

where

- $L'$  = rail inductance per unit length
- I = rail current

However, more complicated Lorentz force formulations may be used when they are available.

Substituting the friction and air resistance equations (2 and 3) into equation 1, the equation becomes

$$a = [F - 2\mu_{ar} R b p_r \beta - 2\mu_{ai} R b p_r (\pi - \beta) - \mu_{ar} \frac{h}{l + h} mg \cos \alpha - \mu_b \frac{l}{l + h} mg \cos \alpha - .5\rho AC_D v^2 - mg \sin \alpha] / m \quad (5)$$



If the  $\alpha$  angle is small, then equation 5 may be further reduced to the following form:

$$a = [F - 2\mu_{ar}Rbp_r\beta - 2\mu_{ai}Rbp_i(\pi - \beta) - (\mu_{ar}h + \mu_b l) \frac{mg}{L + h} - .5\rho AC_D v^2]/m \quad (6)$$

To get the upper bound of the acceleration, the friction forces, weight of projectile, and air resistance may be also ignored. Consequently, equation 6 becomes

$$a = F/m \quad (7)$$

Many engineers and scientists use this formula although the computed result is usually 20 to 40 percent larger than obtained from experimental data. Sometimes an empirical correction factor,  $C$ , is used which represents the effect (in proportion to the Lorentz force) of the sum of the frictions, air resistance, and gravity forces on the right-hand side of equation 5. This reduces the magnitude of the propulsion force in order to make the computation more nearly agree with experimental results. The value of  $C$  ranges approximately 0.2 to 0.4. Using the correction factor,  $C$ , the equation becomes

$$a = F(1 - C)/m \quad (8)$$

The axial or x-direction velocity,  $v$ , and the travel or displacement,  $x$ , of the projectile are the first and second integration of acceleration with respect to time, respectively. They are

$$v = \int_0^{t_1} a dt \quad (9)$$

$$x = \int_0^{t_1} v dt \quad (10)$$

### Solution of Governing Equations

The procedure to solve the governing equations is as follows:

Acceleration is computed first. Velocity and displacement then may be solved in a closed form if it is easy to perform the first and second integrations of the acceleration with respect to time. Otherwise, standard numerical integration techniques may be used to compute them.

When the acceleration is constant, a closed form solution is obtained by integration. The velocity and displacement at any time,  $t$ , are

$$v = at \quad (11)$$

$$x = .5at^2 \quad (12)$$

and consequently,

$$t = v/a \quad (13)$$

$$v = \sqrt{2ax} \quad (14)$$

$$x = \frac{v^2}{2a} \quad (15)$$

### Sample of Computation

A simple example with no frictions or air resistance is presented below. It shows the computation of the case where the input current versus time curve is shown in figure 2. The other data of input are

Barrel length = 4 m

Mass of armature,  $m_a = 0.002$  kg

Mass of projectile,  $m_p = 0.003$  kg

Rail inductance gradient,  $L' = 0.35 \mu\text{H/m}$

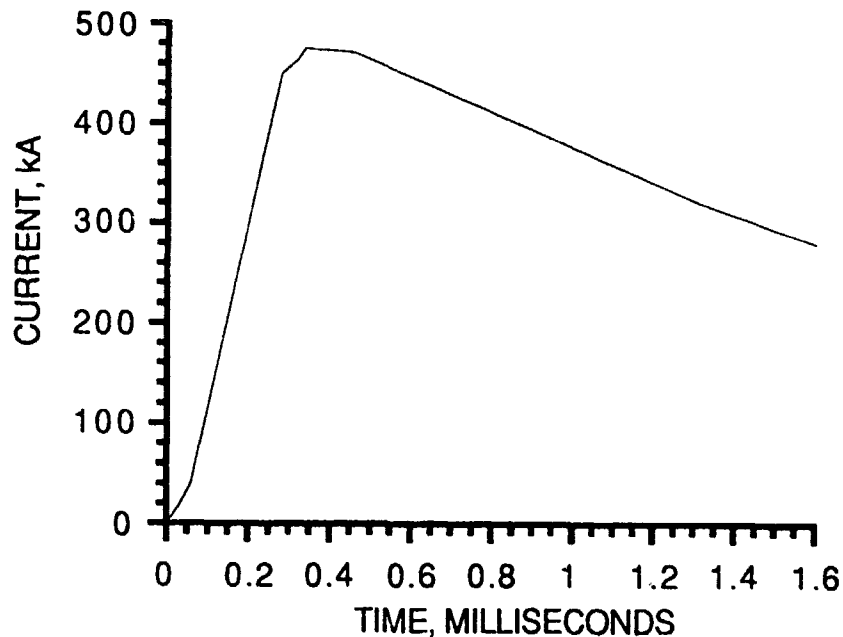


Figure 2. Rail current versus time

Using the numerical integration procedure, the acceleration, velocity and displacement are computed and the results are plotted in figures 3 through 7.

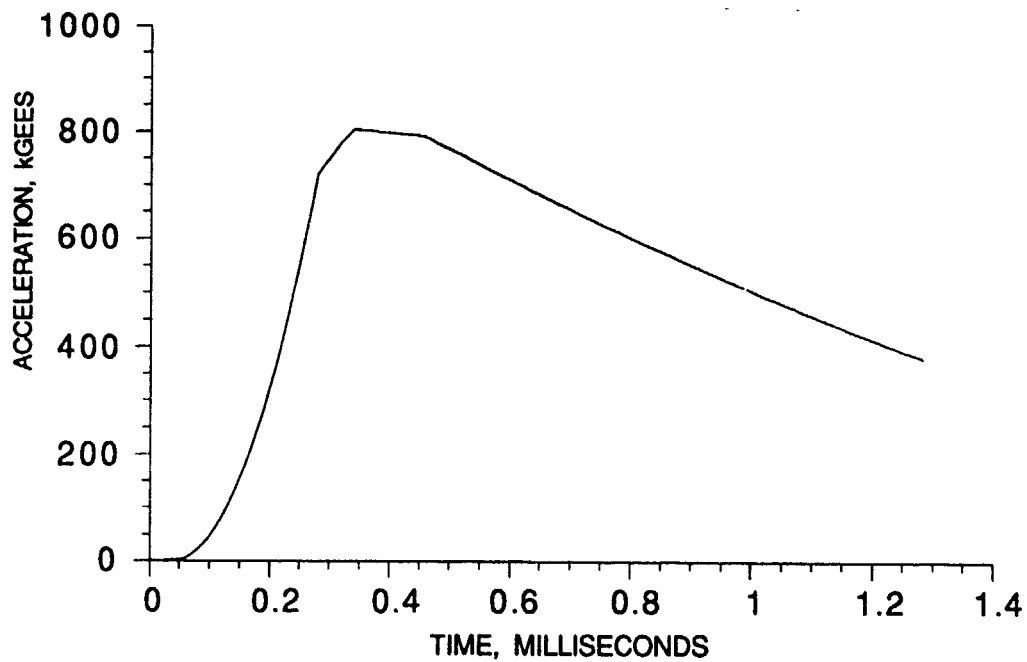


Figure 3. Acceleration versus time

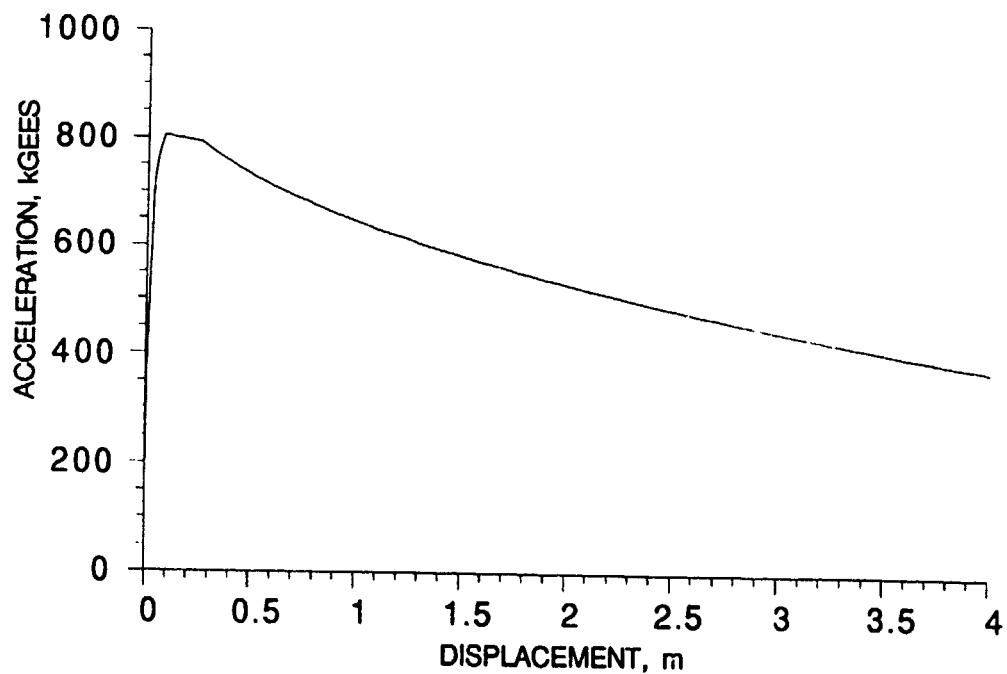


Figure 4. Acceleration versus displacement

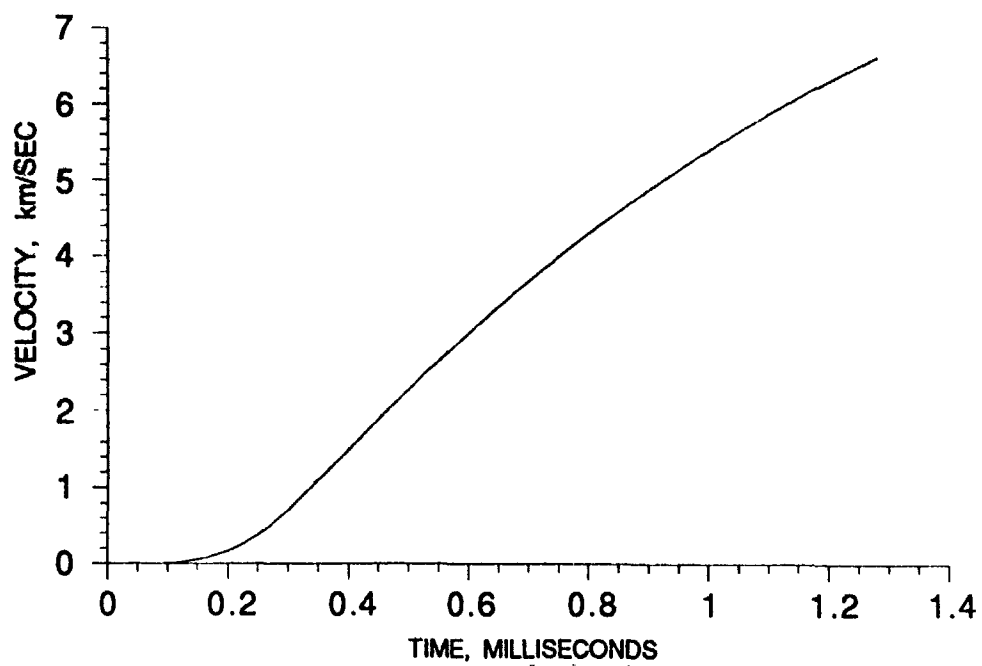


Figure 5. Velocity versus time

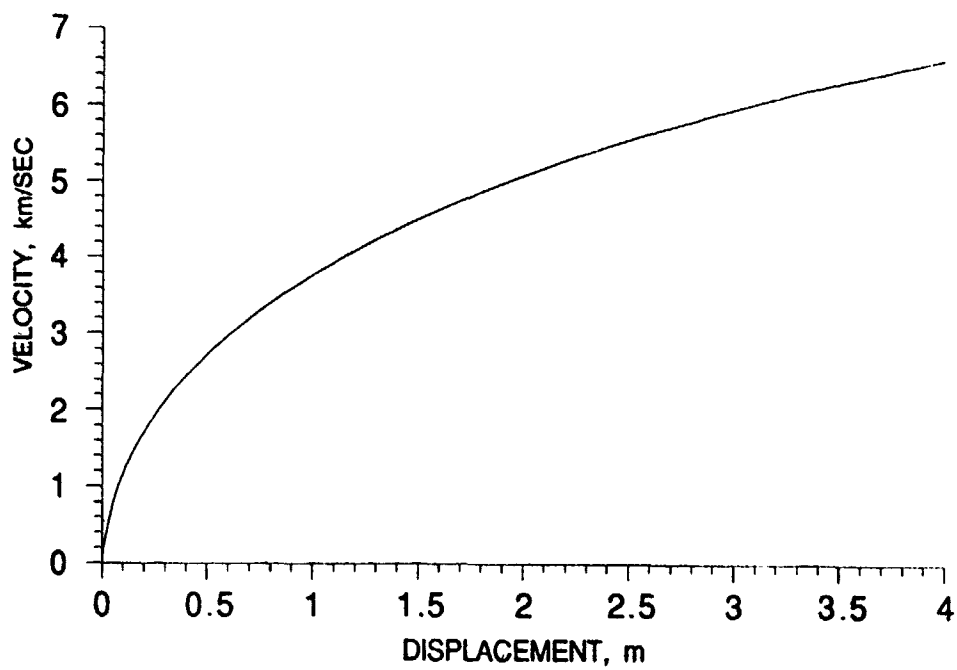


Figure 6. Velocity versus displacement

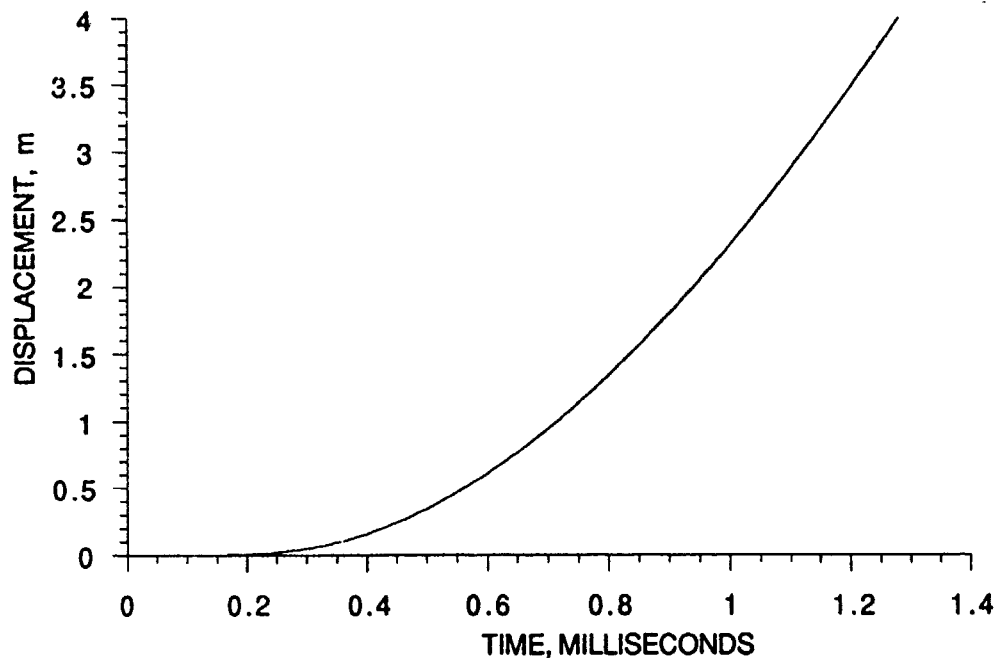


Figure 7. Displacement versus time

When the rail current is constant, say 475 kA, the acceleration is also a constant. Using equation 4, the propulsion force is

$$\begin{aligned} F &= .5L I^2 \\ &= 39.5 \text{ kN} \end{aligned} \quad (16)$$

Substituting this value and the mass data into equation 7, the acceleration of the projectile package,  $a$ , is computed as

$$\begin{aligned} a &= F/m \\ &= 805 \text{ kgees} \end{aligned} \quad (17)$$

Then, the velocity,  $v$ , when the projectile package is at the muzzle, is computed using equation 14, and the value is

$$\begin{aligned} v &= \sqrt{2ax} \\ &= 8 \text{ km/sec} \end{aligned} \quad (18)$$

The corresponding time is

$$\begin{aligned} t &= v/a \\ &= 1 \text{ ms} \end{aligned} \quad (19)$$

## CONCLUSIONS

Utilizing Newton's second law of motion and making a number of logical assumptions on the various forces occurring within the electromagnetic railgun, a set of simple basic equations has been derived. With these equations it is possible, when the current versus time profile is known, to calculate approximate values for the acceleration and velocity of the projectile package as it moves along the railgun and the associated values for time and travel (displacement). Plotting these calculated acceleration and velocity values versus time or travel provides a good approximation of the axial motion of the projectile package.

Further experimental data is necessary to enhance the accuracy of the assumptions, e.g., the magnitude of the frictional forces within the railgun.

More complicated models will be introduced in subsequent reports which will include lateral forces and gun tube vibration effects.

## REFERENCE

Chu, Szu Hsiung, "A Simple Theoretical Model for Projectile In-Bore Motion of Electromagnetic Railguns," pp. 204-223, Proceedings of the Fifth U.S. Army Symposium on Gun Dynamics, Special Publication ARCCB-SP-87023, U.S. Army ARDEC, Benet Laboratory, Watervliet, New York, September 1987.

## DISTRIBUTION LIST

Commander

Armament Research, Development and Engineering Center

U.S. Army Armament, Munitions and Chemical Command

ATTN: SMCAR-IMI-I (5)

SMCAR-FSE (10)

Picatinny Arsenal, NJ 07806-5000

Commander

U.S. Army Armament, Munitions and Chemical Command

ATTN: AMSMC-GCL (D)

Picatinny Arsenal, NJ 07806-5000

Administrator

Defense Technical Information Center

ATTN: Accessions Division (12)

Cameron Station

Alexandria, VA 22304-6145

Director

U.S. Army Materiel Systems Analysis Activity

ATTN: AMXSY-MP

Aberdeen Proving Ground, MD 21005-5066

Commander

Chemical Research, Development and Engineering Center

U.S. Army Armament, Munitions and Chemical Command

ATTN: SMCCR-MSI

Aberdeen Proving Ground, MD 21010-5423

Commander

Chemical Research, Development and Engineering Center

U.S. Army Armament, Munitions and Chemical Command

ATTN: SMCCR-RSP-A

Aberdeen Proving Ground, MD 21010-5423

Director

Ballistic Research Laboratory

ATTN: AMXBR-OD-ST

Aberdeen Proving Ground, MD 21005-5066



**Chief**

**Benet Weapons Laboratory, CCAC  
Armament Research, Development and Engineering Center  
U.S. Army Armament, Munitions and Chemical Command  
ATTN: SMCAR-CCB-TL  
Watervliet, NY 12189-5000**

**Commander**

**U.S. Army Armament, Munitions and Chemical Command  
ATTN: AMSMC-IMF-L  
Rock Island, IL 61299-6000**

**Director**

**U.S. Army TRADOC Systems Analysis Activity  
ATTN: ATAA-SL  
White Sands Missile Range, NM 88002**